

# Heavy-Line 2-Post-Lift

Item No.: TW260B4.5

**kg 6000 kg** **↑ 1,90 m** **⚡ 400 V** **⚙ Autom.**



## Description

This professional lift has a lifting capacity of 6.0 t and 3-stage telescopic lifting arms enabling you to lift anything from a small car to a transporter or a camper with a long wheelbase. With a height of 4450 mm, you can lift vehicles such as Fiat Ducato or a Mercedes sprinter e.g.

## Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Column chain guard
- Automatic safety-lock-release system
- Automatic arm-locking system
- Two hydraulic cylinders provide powerful lifting and lowering
- Steel cable synchronization
- Special rolled section columns
- 3-stage telescopic lifting arms
- **Anti-Lift-Up-Button**, allows you to lower the lift without it having to rise before sinking plus a 230 V Euro-socket placed in the control box.
- **NEW: Motor-Cover included**  
Stylish design, dust protection and noise reduction
- **Optional air connection (Air-Kit) available**

## Delivery contents

- Lift incl. Power unit and Motor-Cover
- Heavy duty anchor bolts (12 pcs.)
- Transporter adapters (4 pcs.)
- Bracket for extension adapter
- Rubber door protectors | English instruction manual
- Examination book and CE-Certificate
- **Product video online | Assembly video online**



## Included

Transporter adapters  
4 pcs.

Practical storage bracket for two extension adapters (2 pcs.)


## Videos

Product video  
 Assembly video

*Note try our technical decision helper (on page 5) before buying your 2-post lift(s)!*





## Vehicle type / Wheelbase

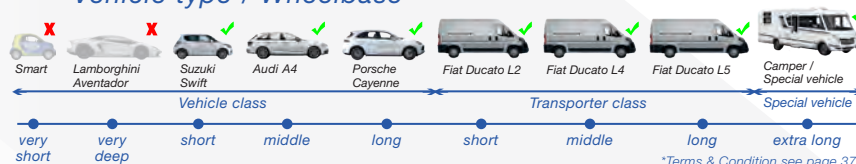

\*Terms & Condition see page 37



## Dimensions

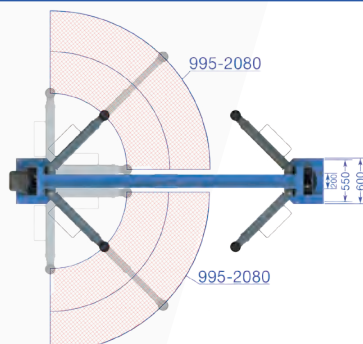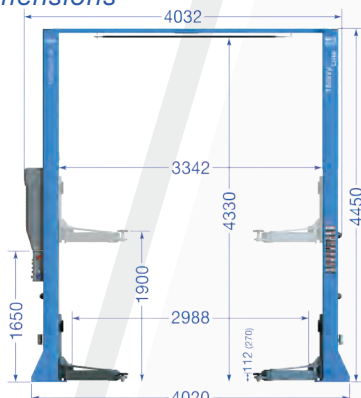

The 6 ton lifts have longer arms than the 5 ton lifts which will limit the type of cars which can be lifted but allows longer motorhomes to be lifted.

## Technical Data

Lifting capacity	6000 kg
Lifting height max.	1900 mm/Ad 2080
Lowest lifting point	112 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	400 V / 3 Phase
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	1120 kg


Further information to be found at [www.twinbusch.co.uk](http://www.twinbusch.co.uk)

## Optional accessory



Through experience the required concrete depth (foundation requirement of 250 mm) should be met, this must be checked by the customer. If in exceptional cases the foundation requirement is not met, we offer on page 19 a special solution, which can be used with a concrete thickness of 200 mm to 250 mm.

Wheel gripper (set of 4)  
Item No.: TW260RAD



LED lighting (LED-KIT)  
for 2-post lifts  
(Item No.: TWLED-2B)



Further accessories can be found at [www.twinbusch.co.uk](http://www.twinbusch.co.uk)