



Tyre changer - 2 Speed with WDK-certificate

Item No.: TWX-36WDK



Description

Tyre changer with pneumatic tilting mounting arm and a built-in air booster. For standard, low profile, UHP and run-flat tires. Including assistant arm. The TWX-36WDK is a tire mounting machine of a professional class, tested with the strictest WDK guidelines. The TWX-36 is characterized by many additional features, such as the assistant arm with two tyre rollers, specially shaped presses, an extra thick bead breaker, (adjustable) 2-speed rotary table (7 and 14 rpm), adjustable bead holder, bead chain, Rim flange protection and a certified WDK installation tyre lever. With the TWX-36WDK, a professional and damage free removal and installation is guaranteed.

Features

- WDK certificate | Quality workmanship
- Manufactured in accordance to ISO 9001
- 2 speed turntable (7 and 14 rpm)
- Adjustable tilting arm | Robust construction
- Tyre and rim damage free mounting according to WDK
- Pneumatic mounting head locking
- Strong bead breaking (3000 kg)
- Large clamping range 12" - 26"
- Built in Air booster to aid tyre fitting
- Changeable mounting head rim protectors
- Strong electric motor for easy tyre fitting
- High quality steel clamps for long life
- Quality controls for fine adjustment and stop function
- Stainless steel internal parts (advantage: no rust)
- Self centering 4 clamping system

Delivery contents

- Tyre changer with maintenance unit
- Air filler and tyre lever according to WDK
- Rim protector, Bead press (adjustable), Bead chain
- Bead press restrictor
- Plastic protectors for the mounting jaws (4 pcs.)
- Plastic protectors for the mounting head (set 3 pcs.)
- Operating instructions
- **Assembly video online | Product video online**



Check our technical decision helper (on page 38) before you buy your tyre changer!

Videos




Product video



Assembly video



Dimensions

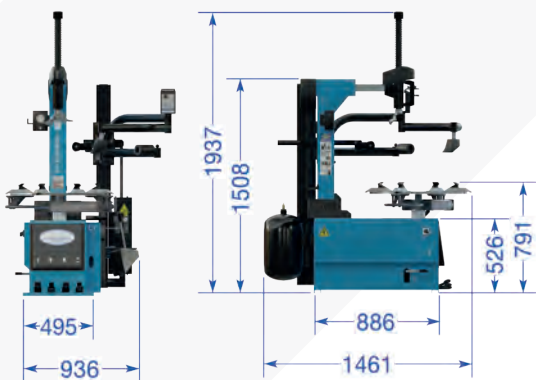

Delivery contents



Technical data

Clamping range outside	12" - 24"
Clamping range inside	14" - 26"
Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	3000 kg
Air supply	8-10 bar
Power supply	400 V / 3 Phase
Motor power	1,1 kW
Revolution speed	7 and 14 U/min.
Fusing	16 A / type C
Noise level	<70 dB
Weight (approx.)	360 kg

Optional accessory

Motor bike wheel adapter
Item No.: TWX-MOTO
4 pieces in the set



Plastic-Mounting-Head
Item No.: TWX-KMK



Chain bead press
Item No.: TWX-KETTE



Bead press lockable
Item No.: TWX-WULKL



Tyre mounting paste | Item No.: TW1530MP



Further accessories can be found at www.twinbusch.co.uk